



Central Heating Module

Model 2000-0250



Features:

- Propane or natural gas fuel source.
- Compact and portable design for easy positioning on the work site.
- All system operation is controlled and monitored from the heat module control panel
- Temperature control and fuel usage is automatic.
- 8-light system operation feature for easy system troubleshooting.
- Fluid circulation system is low pressure and atmospherically vented. There is no chance of an explosion or line burst due to pressure build-up. No special boiler certification is required to operate the system.
- Quick-connect hose couplers, "no-drain" fluid lines and a "rapid air elimination" feature ensures quick setup-and-go operation.

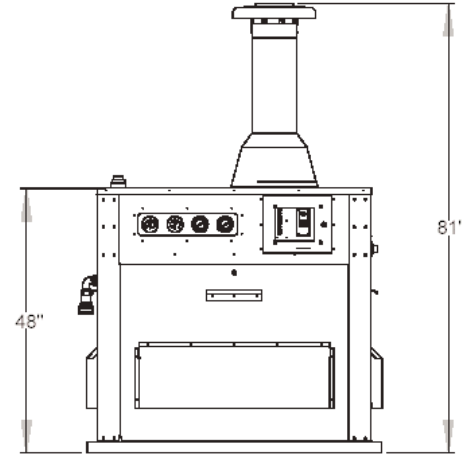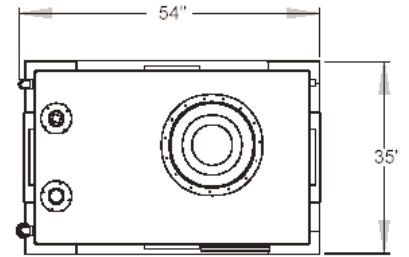

Specifications

Type.....	Electric spark ignition
Temperature Range.....	120°F to 200°F (49°C to 93°C)
Fuel specs	
Natural gas fired	
*Input capacity	248,000 BTU/H
*Output capacity	199,000 BTU/H
Gas pressure range.....	5"-14" W.C.
Manifold gas pressure ...	4" W.C.
Consumption - max.	248 CU.FT/H (7 CU.M/H)
Propane fired	
*Input capacity	248,000 BTU/H
*Output capacity	199,000 BTU/H
Gas pressure	11" W.C.
Manifold gas pressure ...	10" to 11" W.C.
Consumption - max.	2.71 US GAL/H (10.3 L/H)

Controls & monitoring	Full gauge panel monitoring circulation fluid temperatures & pressures, fuel pressures
.....	8-light system operation feature for easy system troubleshooting.
Weight - basic.....	820 LBS. (372 KG)
Electrical	115 V, single phase, 60 Hz, 15 A
Module fluid circulation system	
Basic features.....	Atmospherically vented low pressure system, adjustable fluid temperature control, auto temperature bypass for heat exchanger protection.
Heat transfer fluid (HTF)....	Non-toxic propylene glycol / water mixture, freeze protected
Lines & couplers.....	1" fluid circulation hose, 1" quick-couplers
Circulation pump.....	3/4 HP, 30 GPM (136 LPM) @ 30 P.S.I.

* No BTU deration for high altitude operation



Heat Thaw Cure Dry